
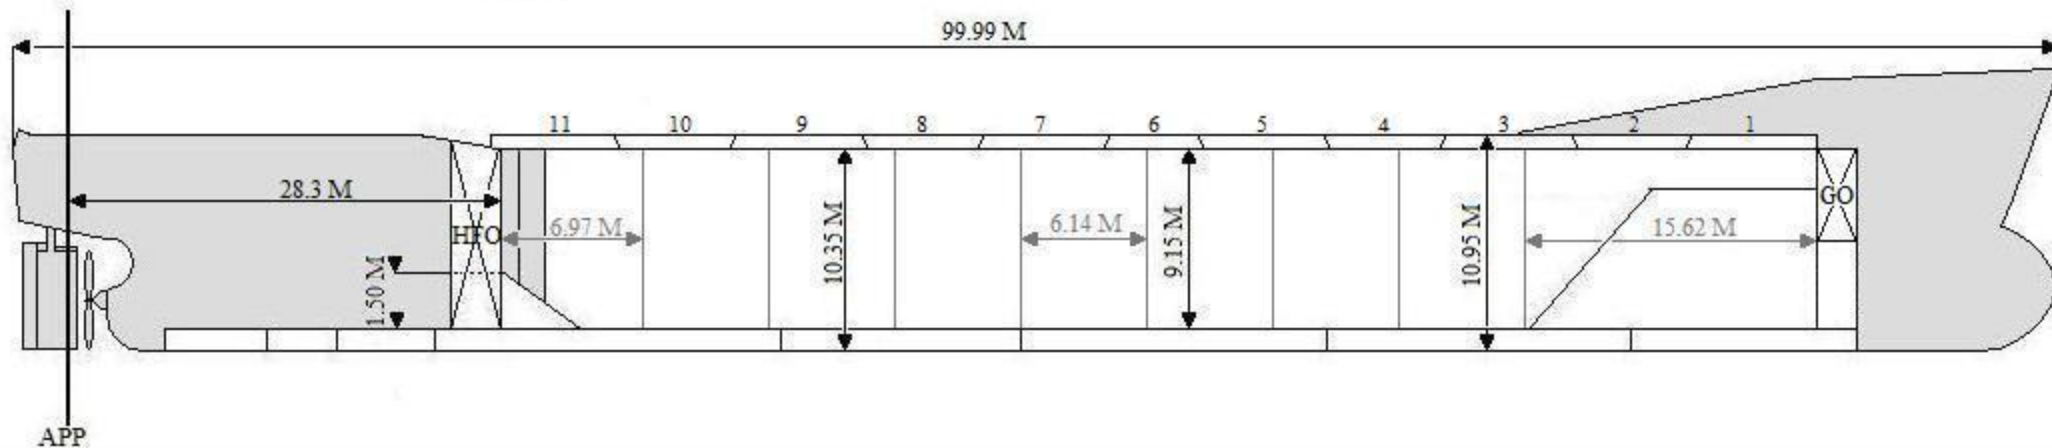


# General Arrangement mv Saffier


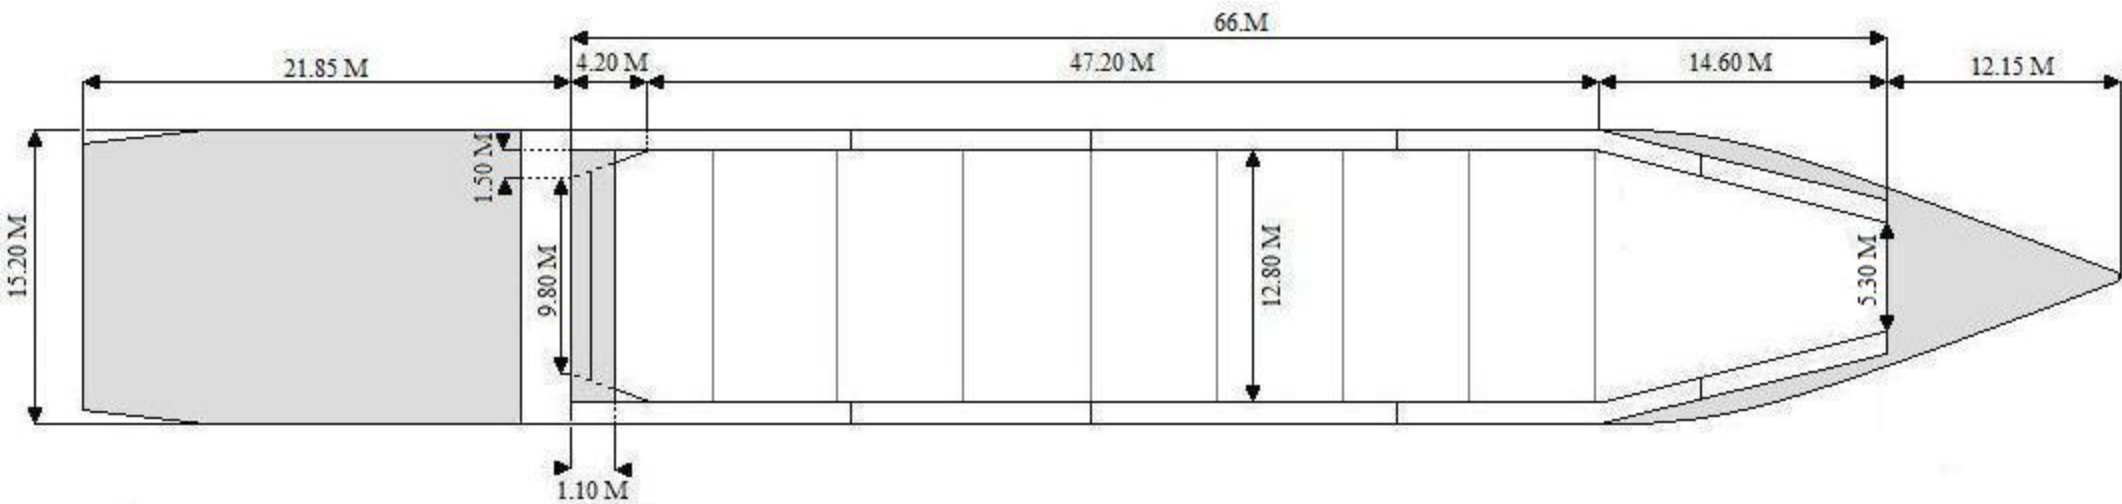


Except the HFO and GO tanks forward and aft as shown on this plan there are no fuel tanks adjacent to the hold.

Lashing deck: on the coaming bollard are positioned every 1.5 meter. SWL 10 MT.  
D rings are available on every container fitting on the hatches.

Lashing hold: in the sides lashing points of 10 MT are positioned every 1.60 meter.  
Different heights of 1 or 1.80 meter. D rings are available on every container fitting.

# Stowageplan mv Saffier

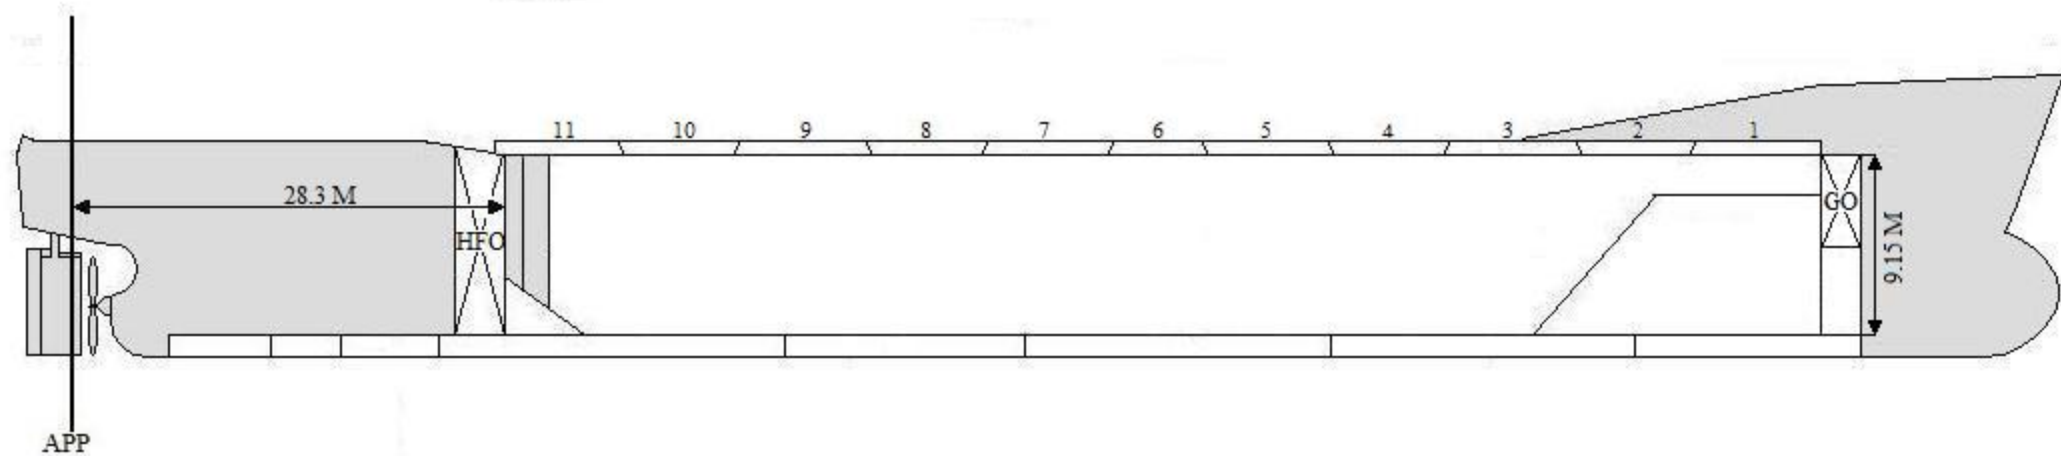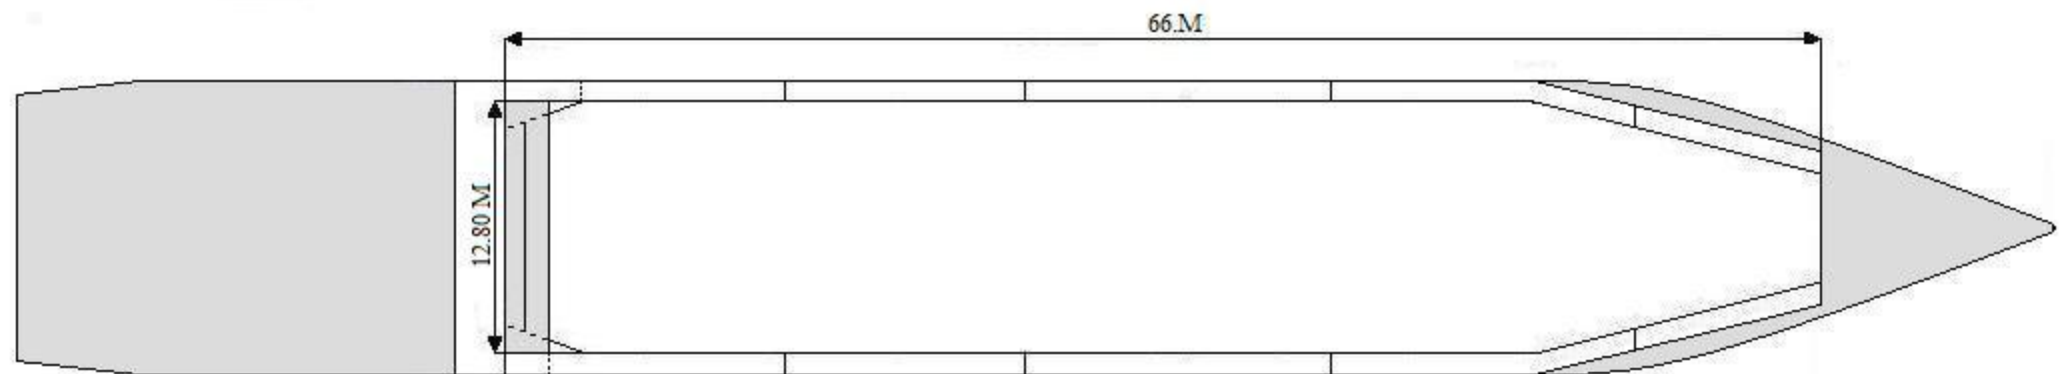

Date: \_\_\_\_\_ Carco: \_\_\_\_\_

Loading Port: \_\_\_\_\_ Total weight: \_\_\_\_\_

Discharging port: \_\_\_\_\_